



INVESTOR IN PEOPLE

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 800

REC'D 02 FEB 2001

WIPO

PCT

CR301/126

4  
I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated

18<sup>th</sup> January 2001



(Patents Act 1977  
16)



# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference	XA1266		
2. Patent application number (The Patent Office will fill in this part)	0001549.5		
3. Full name, address and postcode of the or of each applicant (underline all surnames)	British Aerospace PLC Warwick House, P.O. Box 87 Farnborough Aerospace Centre Farnborough, Hampshire, GU14 6YU 5116092 ✓ United Kingdom		
Patents ADP number (if you know it)			
If the applicant is a corporate body, give the country/state of its incorporation			
4. Title of the invention	LIGHTNING PROTECTION APPARATUS AND METHOD		
5. Name of your agent (if you have one)	Paul Blaise ROONEY		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	BAE SYSTEMS Group IP Department Lancaster House, P.O. Box 87 Farnborough Aerospace Centre Farnborough, Hampshire, GU14 6YU		
Patents ADP number (if you know it)	79146 74002		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	08
Claim(s)	04
Abstract	01
Drawing(s)	05 + 5

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 01

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

*Paul Blaise ROONEY*  
Paul Blaise ROONEY

Date

24/01/2000

12. Name and daytime telephone number of person to contact in the United Kingdom

Nesta Carantonis - 01252 384628

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## LIGHTNING PROTECTION APPARATUS AND METHOD

This invention relates to lightning protection apparatus and in particular but not limited to lightning protection apparatus for radomes.

It is well known that electric fields distort around sharp points causing a concentration of field strength about such points. As a consequence of this, sharp extremities on tall buildings and air borne vehicles are particularly prone to being struck by lightning in a storm. This is a particular problem for aircraft which, in order to be more aerodynamic, often incorporate sharply radiused projections. One example of such a sharply radiused projection is the radome which is generally fitted to the nose of an aircraft.

The radome generally carries the radar system and other electro-magnetically sensitive equipment and is by necessity made from a dielectric material, consequently a lightning strike to the radome can result in disintegration of the radome and subsequent loss of the aircraft through aerodynamic instability. Thus, aircraft are provided with lightning protection systems to limit the damage which may be caused in the event of a lightning strike to the radome.

Conventional protection systems are known as lightning diverters. These generally consist of metal strips extending from the tip of the radome, across its external surface and back towards the metal airframe of the aircraft. When lightning strikes the radome, the current is carried by the conducting strips to the metal airframe where higher current densities can be safely dissipated. More recent variations comprise what is known as a button strip. This consists of a row of closely spaced metal dots carried on a strip of dielectric material. Just prior to a lightning strike, the atmospheric electric charge surrounding the aircraft builds, the dielectric begins to ionise, thus initiating the electrostatic ionisation of surrounding air molecules. The metal dots increase their local field strength and form a plasma thus providing a conductive channel for conducting the current induced by the lightning.

During lightning strike the small quantities of metals used in these conductors are subject to extreme temperatures and electro-dynamic forces which tend to cause them to ablate. As a consequence, these systems have a "one strike" capability and must be replaced on landing.

A further problem with these conventional technologies is that they require the presence of metal on the radome at all times, irrespective of atmospheric conditions. The conductive properties of this metal can cause serious aberration of radar system radiation patterns, with consequent degradation in the system's performance.

The present invention provides a lightning protection apparatus for a radome comprising;

a source of electrically conducting fluid;

a delivery means for delivering the conducting fluid to the surface of the radome prior to a lightning strike;

a control means for controlling the delivery system; and

means for directing the conducting fluid across the outer surface of the radome thereby providing a conductive channel for the passage of electrical current resulting from a lightning strike and dissipating said current without damage to the radome.

The provision of the electrically conductive medium in a fluid form permits a flexible system whereby the lightning conductive element can be deployed as and when atmospheric conditions are such that there is a significant risk that lightning may strike. The control means monitors the atmospheric condition and initiates delivery of the conductive fluid through the delivery means to the surface of the radome when a change indicative of a high probability lightning strike is detected.

Airflow over the radome surface during flight is sufficient to carry the conductive fluid across the radome surface and direct it towards the airframe thus providing a channel for conducting any current induced by a lightning strike to the airframe for dissipation. When conditions are such that there is no significant danger of lightning strike, the conductive fluid can be removed from the radome surface. When lightning protection is not needed, the conductive fluid can be stored in an insulating container thereby removing the conductive interference from the radar system and any consequent degradation of radar performance.

The control means will generally comprise a series of sensors for detecting changes in the atmosphere associated with imminent lightning. These sensors may detect factors such as changes in light levels, temperature, humidity and the like but most preferably detect changes in electrostatic field strength. Preferably, threshold sensors are also incorporated into the control means for recognising when the field strength has exceeded a predetermined level indicative of a high probability of lightning strike. The control means may additionally incorporate software for controlling the delivery and removal of the fluid. Typically, a predetermined threshold level would be in the region of 1000 volts per metre.

In some circumstances, aircraft are known to accumulate electrostatic charge in the course of flight in relatively stable weather conditions. In these circumstances the polarity of the E-field over the entire surface of the aircraft will be the same (i.e. either directed outward from the surface, or inward towards the surface at all points). In a high probability of lightning strike atmosphere, the polarity of the E-field at the aircraft surface will vary over the surface, being outward in some regions, and inward in others. Thus, in order to better discriminate high probability lightning strike conditions from strong E-fields due to other phenomena, it is preferred that the control means incorporate a means for detecting localised polarity of E-fields at the aircraft surface.

In some embodiments of the invention, this is achieved by providing a plurality of polarity sensitive electrostatic field sensors located at diverse positions on the aircraft surface, preferably in a circumferential spatial arrangement about the longitudinal axis of the radome. It is advantageous to sample the field at surfaces facing upward, downward, left, right, forward and backward. Suitable electrostatic and polarity sensitive sensors include integrated optics E-field sensors such as those which utilise Pockel's or Kerr's electro-optical effects in materials such as Lithium Niobate. A logic circuit is also incorporated which is configured to recognise a condition where at least one electrostatic sensor detects a field amplitude which exceeds the predetermined threshold level and the polarity of the field detected by each of the plurality of electrostatic field sensors is not the same. When this condition is recognised, the logic circuit activates the delivery system by any suitable switching mechanism.

Whilst airflow is sufficient to direct the conductive fluid across the radome, it may be preferable to provide some form of guide in the surface of the radome to enable the conductive fluid to travel consistently in the same path. Such a guide may conveniently be provided in the form of a shallow groove on the surface of the radome.

Once the threat of a lightning strike has passed, it is desirable to remove the conductive channel from the radome surface. Again, once the delivery means has ceased delivery of the fluid, air flow can be used to remove the fluid from the surface. Preferably, the apparatus will comprise features specifically designed to remove the fluid. In one option, such a feature may comprise a source of clean carrier liquid and means for flushing the clean carrier liquid through the delivery system and over the conductive channel thereby removing the conductive channel. The control means can be configured to recognise changes in the surrounding atmosphere indicative of a reversion from a high probability of lightning strike condition back to a normal condition.



The delivery means itself may comprise any suitable form but conveniently comprises two or more dielectric capillary tubes which vent close to the tip of the radome and a pump and valve arrangement associated with a reservoir of the conducting fluid for pumping fluid into the capillary tubes. The delivery system is conveniently operated by a pneumatic or hydraulic system and should be electrically and spatially isolated from the conducting airframes or anything electrically connected to us, in order to prevent lightning striking the aircraft via a path inside the radome. This may conveniently be achieved by operation via a pneumatic or hydraulic system, employing non-electrically conducting pipes and fluids. Alternatively, the delivery means may be operated by electric pump and valve means powered by a local battery and the control means comprises a signalling circuit of optical fibres.

Where a pump is used to deliver the conductive fluid, the pump may have a reversible action so that the fluid can be withdrawn back into the reservoir when the threat of lightning is removed.

Suitable fluids for use as the conductive fluid include any dielectric carrier loaded with conducting particles. For example distilled water carrying carbon particles. Additives which may optionally be added to improve performance include, wetting agents, anti-blockage agents which separate particles to prevent blockage of delivery tubes and orifices, additives for reducing the evaporation temperature or rate of evaporation of the fluid and anti-static or anti-cling agents to minimise adherence of conductive particles after delivery. Alternative fluids include conductive gases or particulates of conductive material such as mercury vapour or carbon smoke.

In another aspect, the present invention provides a method for conducting lightning across the surface of a non-conducting article comprising;

providing a source of electrically conducting fluid;

delivering the conducting fluid to the surface of the article prior to a lightning strike;  
and

directing the conducting fluid across the outer surface of the article thereby providing a conductive channel for the passage of electrical current resulting from a lightning strike and dissipating said current through a conductive medium.

For the purposes of exemplification, some embodiments of the invention will now be described with reference to the Figures in which:

Figure 1 shows a schematic flow chart of one embodiment of the inventive system.

Figure 2 illustrates a pneumatically operated embodiment of the invention.

Figure 3 illustrates an electrically operated embodiment of the invention.

Figure 4 illustrates the control system for the embodiment of Figure 2.

Figure 5 illustrates the control system for the embodiment of Figure 3.

As can be seen from Figure 1, a system of electrostatic sensors indicated generally by reference numeral 1 provide input to a control system 2 which comprises a threshold sensor and a simple logic circuit. When the logic circuit detects conditions indicative of a high probability of lightning strike, it communicates this to the pump 4 and valves 3 of the delivery system 7, 8. Conducting fluid from a reservoir 5 is transported through valve means 3 and pump 4 to a system of capillary tubes 7 which vent at various points near the tip of the radome. On deployment of the conducting fluid, as the aircraft is in flight, airflow drags the delivered conducting fluid in a direction opposing the direction of travel of the aircraft across the radome surface and towards the metal airframe.

In the particular embodiment shown, a second reservoir 6 of clean carrier fluid is provided. The control system is configured to detect a reversing of conditions to below the threshold value. When this condition is recognised the control system communicates this to the valves 3 which switch to allow release of the clean carrier fluid over the radome surface thereby removing the conductive path. To prevent lightning current being conducted internally to the radome, the conductive fluid reservoir 5, valves 3 and pump 4 are encased in a dielectric container 8, the capillary tubes 7 are also made from an insulating material.

Figure 2 illustrates an embodiment similar to that of Figure 1 incorporated into the nose portion of an aircraft. As can be seen from the Figure, a capillary tube 7 vents at a point A near to the tip of the radar transparent radome 10 of the aircraft. When a high probability of lightning strike is detected, the conductive fluid is pumped from the reservoir 5 via the valves 3 and pump 4 to the capillary tube 7 which is one of a number of similar tubes. Due to the geometry of the aircraft nose cone and airflow during flight, the fluid travels along the bottom surface of the radome towards the metal airframe 16 creating a conductive channel 9 leading from the tip of the radome A to a point B on the conductive airframe 16. A supply of pressurised air is provided via a dielectric pipe 11 to drive the pneumatic pump 4. Additional dielectric pipe work 12 carry hydraulic or pneumatic fluid controlled by the logic circuit to activate the delivery system when a high probability of lightning strike is detected.

The embodiment shown in Figure 3 operates in essentially the same manner as that described in relation to Figure 2, however, in this embodiment, the control system is operated by opto-electric rather than hydraulic and pneumatic means. A battery 14, contained in dielectric container 8 powers the pump 4 and valves 3. Information from and to the logic circuit is relayed via signals through optical fibres 15.

Figures 4 and 5 show the basic circuitry for the sensor system. Figure 4 relates to the embodiment shown in Figure 2 and Figure 5 relates to the embodiment shown in

Figure 3. An E-field sensor 21 detects a charge in the surrounding E-field and relays a signal to an amplifier 22. The signal is processed through a low pass filter 23 and to a comparator 24 where it is compared against a voltage reference 25. Preferably the comparator circuit incorporates a polarity identifier. Simultaneously other signals are relayed by other sensors 21a, 21b, 21c, 21d through similar circuits. The comparators 24 relay the signal to the threshold detector 2 and logic circuit for processing.

Whilst the foregoing embodiments describe the invention for use in relation to a radome on an aircraft, the skilled person will understand that the invention is not limited to these embodiments. The basic principle behind the invention, that is, the use of a deployable fluid conductor in place of a permanent solid conductor, may be used to replace conventional lightning conductors in numerous other applications.

## CLAIMS

1. A lightning protection apparatus for a radome comprises;

a source of electrically conducting fluid;

a delivery means for delivering the conducting fluid to the surface of the radome prior to a lightning strike;

a control means for controlling the delivery means; and

means for directing the conducting fluid across the outer surface of the radome thereby providing a conductive channel for the passage of electrical current resulting from a lightning strike and dissipating said current without damage to the radome.

2. A lightning protection apparatus for a radome as claimed in claim 1 wherein the control means comprises;

means for detecting a change in surrounding atmospheric conditions indicative of a high probability lightning strike; and

means for initiating delivery of the conducting fluid on detection of such a change in atmospheric conditions.

3. A lightning protection apparatus for a radome as claimed in claim 2 wherein the means for detecting a change in atmospheric conditions comprises one or more electrostatic field sensors and the means for initiating delivery comprises a threshold detector for detecting when an electrostatic field amplitude detected by the one or more electrostatic field sensors exceeds a predetermined threshold level, and a switch for activating the delivery means when the predetermined threshold level is exceeded.

4. A lightning protection apparatus for a radome as claimed in claim 3 wherein a plurality of electrostatic field sensors are provided in a circumferential spatial arrangement about the longitudinal axis of the radome and are polarity sensitive; the means for initiating the delivery system comprises a logic circuit configured to recognise a condition where at least one electrostatic sensor detects a field amplitude which exceeds the predetermined threshold level and the polarity of the field detected by each of the plurality of electrostatic field sensors is not the same, and the switch is activated by the logic circuit only when both these conditions are met.
5. A lightning protection apparatus for a radome as claimed in claim 3 or claim 4 wherein the predetermined threshold level is about 1000 volts per metre.
6. A lightning protection apparatus for a radome as claimed in any preceding claim wherein the means for directing the conducting fluid across the outer surface of the radome comprises grooves on the surface of the radome.
7. A lightning protection apparatus for a radome as claimed in any preceding claim further comprising means for deactivating the conductive channel when the surrounding atmospheric conditions are no longer indicative of a high probability lightning strike.
8. A lightning protection apparatus for a radome as claimed in claim 7 wherein the means for deactivating the conductive channel comprises a source of clean carrier liquid and means for flushing the clean carrier liquid through the delivery system and over the conductive channel thereby removing the conductive channel.
9. A lightning protection apparatus for a radome as claimed in any preceding claim wherein the delivery system comprises two or more dielectric capillary tubes which

vent close to the tip of the radome and a pump associated with a reservoir of the conducting fluid.

10. A lightning protection apparatus for a radome as claimed in any preceding claim wherein the delivery system comprises a pneumatic or hydraulic system in which all control lines are dielectric and the pneumatic or hydraulic fluid used is not electrically conducting.

11. A lightning protection apparatus for a radome as claimed in any one of claims 1 to 9 wherein the delivery means comprises electric pump and valve means powered by a battery and the control means comprises a signalling circuit of optical fibres.

12. A lightning protection apparatus for a radome as claimed in any one of claims 9 to 11 wherein the pump has a forward action for delivering the conductive fluid to the surface of the radome and a reverse action for withdrawing it from the surface of the radome.

13. A lightning protection apparatus for a non-conducting article comprising;

a source of electrically conducting fluid;

a delivery means for delivering the conducting fluid to the surface of the article prior to a lightning strike;

a control means for controlling the delivery system; and

means for directing the conducting fluid across the outer surface of the article thereby providing a conductive channel for the passage of electrical current resulting from a lightning strike and dissipating said current through a conductive medium.

14. A method for conducting lightning across the surface of a non-conducting article comprising;

providing a source of electrically conducting fluid;

delivering the conducting fluid to the surface of the article prior to a lightning strike;  
and

directing the conducting fluid across the outer surface of the article thereby providing a conductive channel for the passage of electrical current resulting from a lightning strike and dissipating said current through a conductive medium.

15. A lightning protection apparatus substantially as described herein and with reference to the Figures.

16. A method for conducting lightning across the surface of a non-conducting article substantially as described herein and with reference to the Figures.



## ABSTRACT

### LIGHTNING PROTECTION APPARATUS AND METHOD

A deployable lightning protection apparatus particularly suited for use with an aircraft radome comprises; a source of electrically conducting fluid (5); a delivery means (3,4,7) for delivering the conducting fluid to the surface of the radome prior to a lightning strike; a control means (1,2) for controlling the delivery means; and means for directing the conducting fluid across the outer surface of the radome thereby providing a conductive channel for the passage of electrical current resulting from a lightning strike and dissipating said current without damage to the radome. The apparatus allows lightning protection to be deployed in response to a change in atmospheric conditions indicative of a high probability of lightning strike and removed when the danger of lightning strike has passed.

[Figure 1]



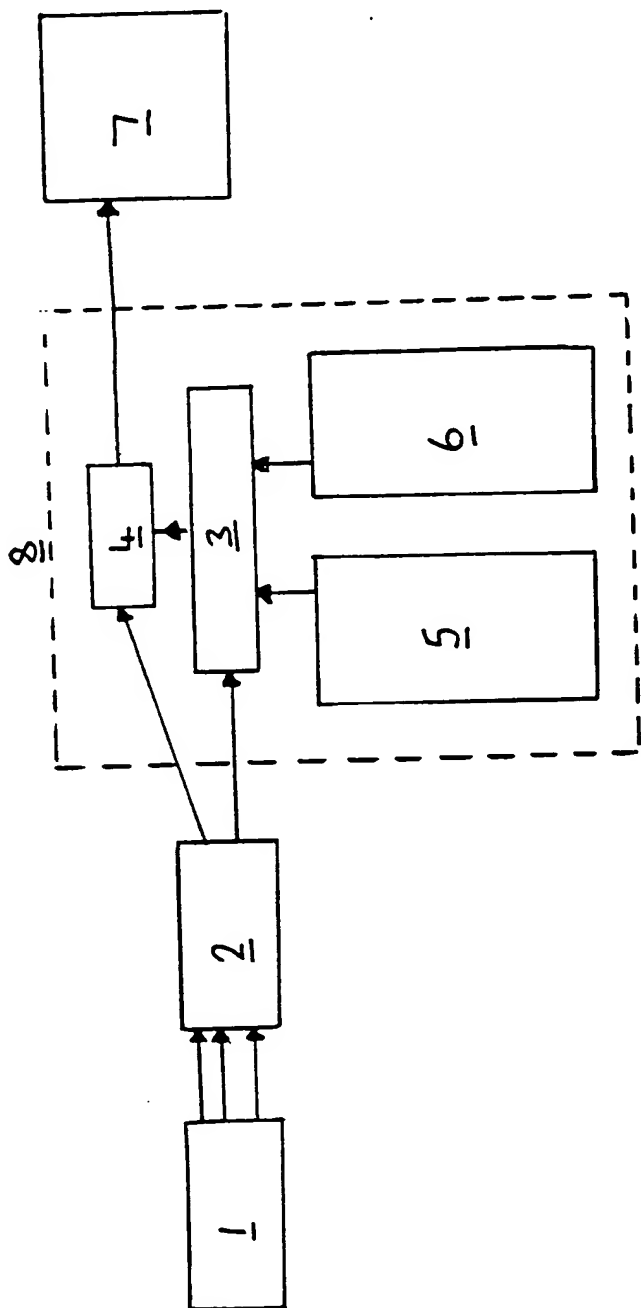


FIG. 1



FIGURE 2

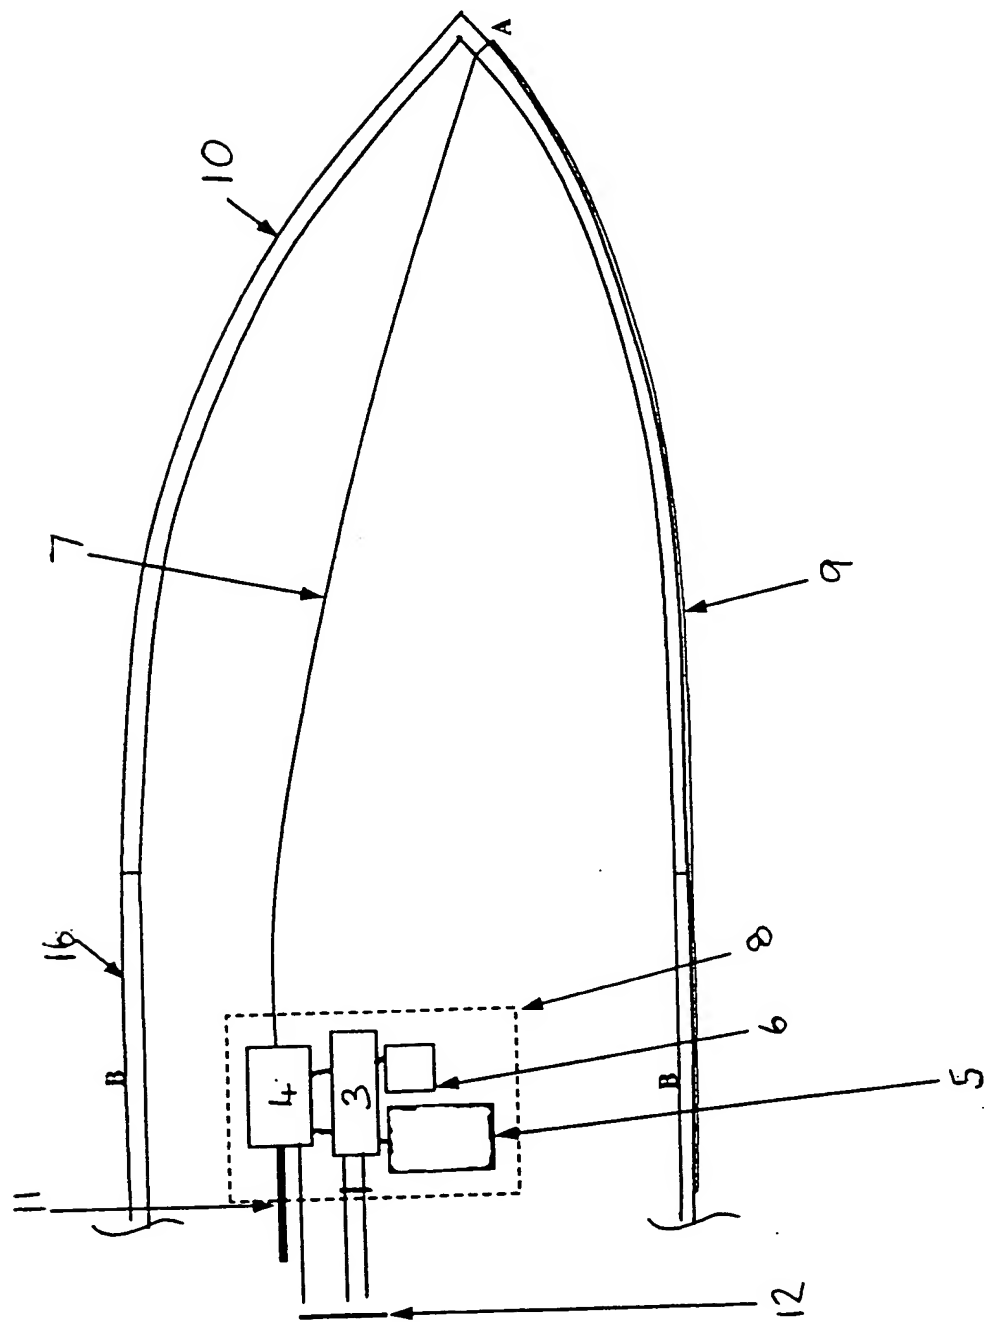




FIGURE 3

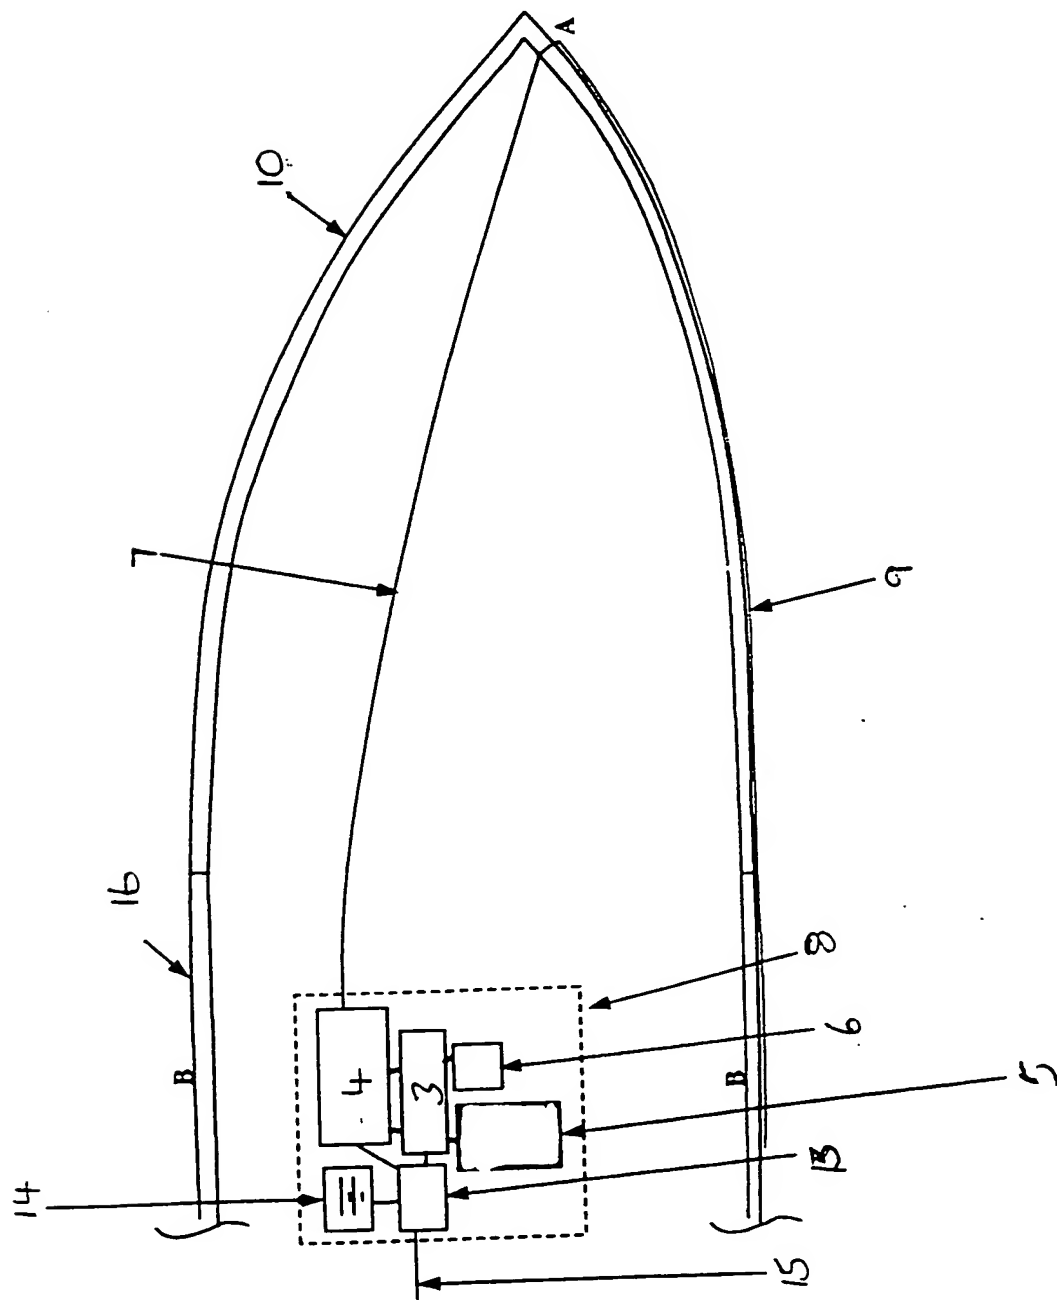






FIGURE 4


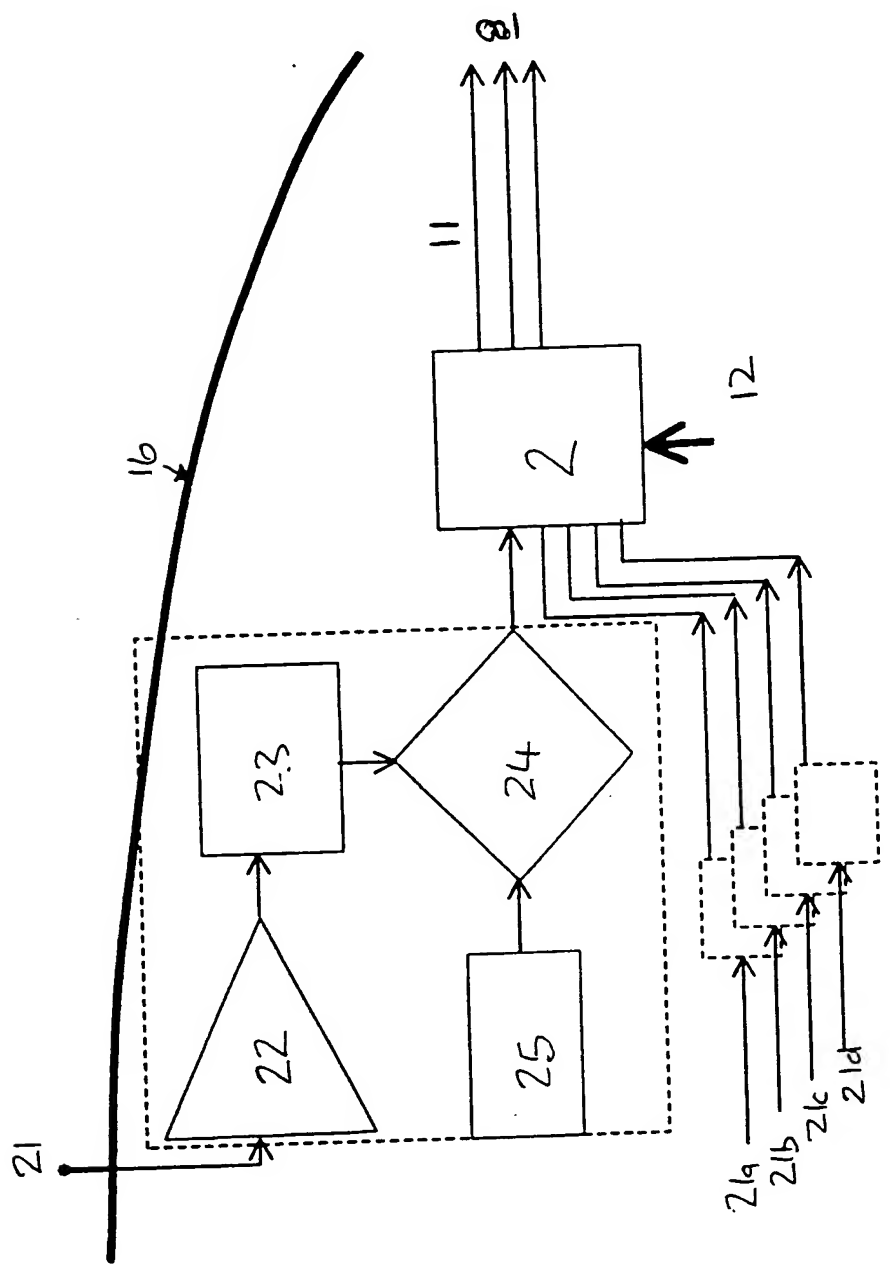




FIGURE 5

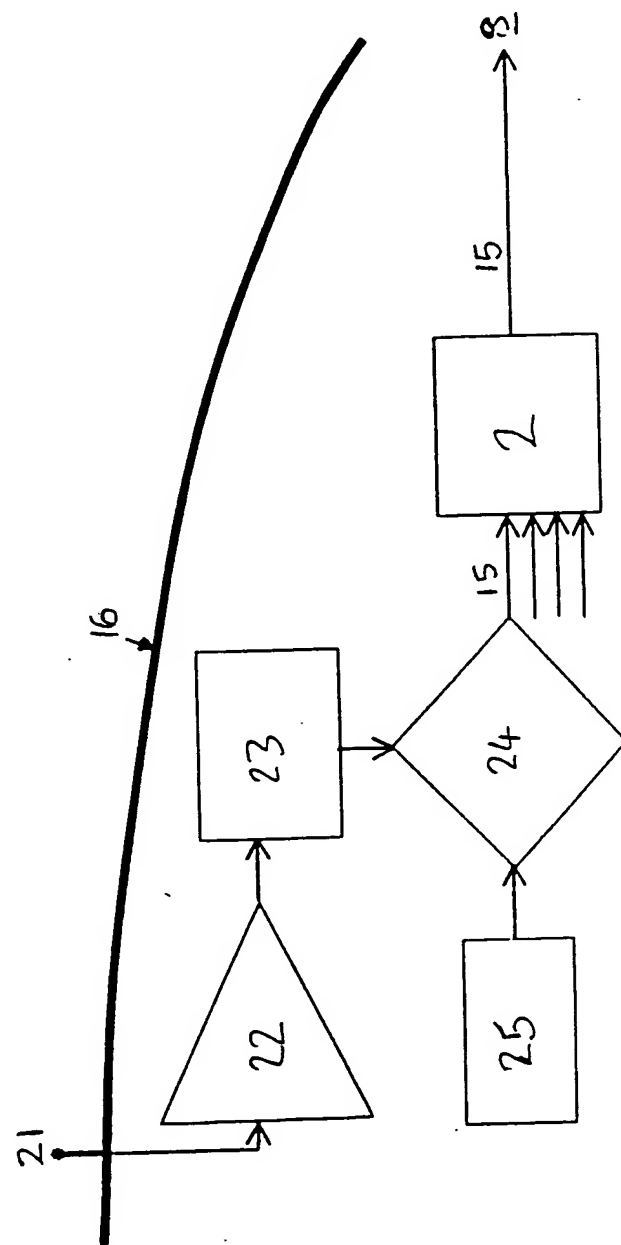

GB01/00126

SEG